WN Series *Enclosed Cabinets*

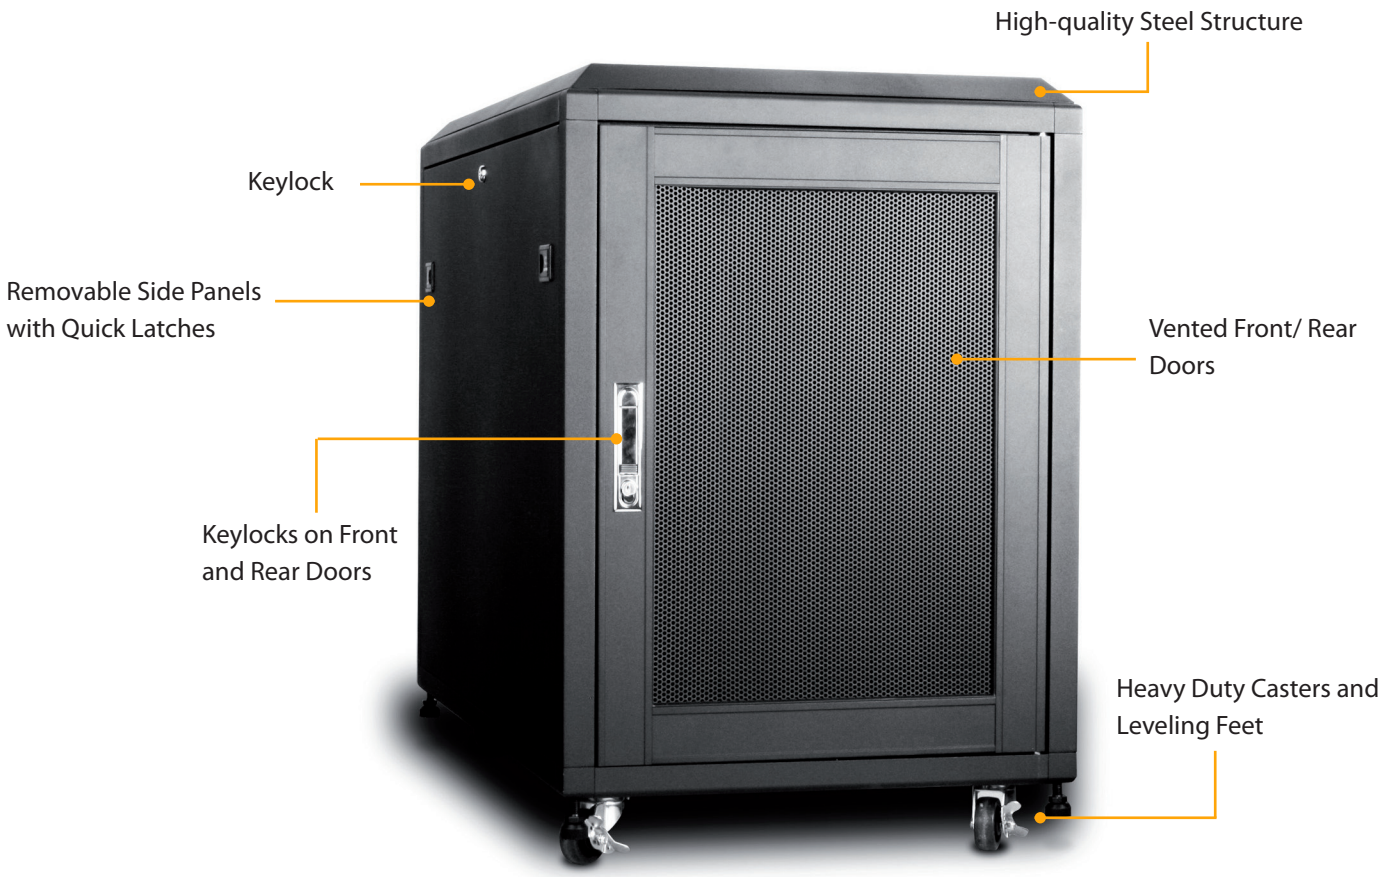

Model No.	Form Factor	Dimension (inches)			Assembly Required?	Loading Capacity (lbs)	Door	Internal Depth	Internal Height	Removable Side panels	Security	Casters	Page No.
		W	H	D									
WN1510	15U	23.50	35.25	39.50	No	2200	Yes	Post-to-post: 17.75″ Hole-to-hole: 18.5″ Max Depth: 34.25″	27.25″	Yes	Key Lock	Yes	37
WN158	15U	23.50	35.25	31.50	No	2200	Yes	Post-to-post: 17.75″ Hole-to-hole: 18.5″ Max Depth: 26.5″	27.25″	Yes	Key Lock	Yes	38
WN2210	22U	23.50	47.75	39.50	No	2200	Yes	Post-to-post: 17.75″ Hole-to-hole: 18.5″ Max Depth: 34.25″	39.75″	Yes	Key Lock	Yes	38
WN228	22U	23.50	47.75	31.50	No	2200	Yes	Post-to-post: 17.75″ Hole-to-hole: 18.5″ Max Depth: 26.5″	39.75″	Yes	Key Lock	Yes	38
WN3610	36U	23.50	71.75	39.50	No	2200	Yes	Post-to-post: 17.75″ Hole-to-hole: 18.5″ Max Depth: 34.25″	64.25″	Yes	Key Lock	Yes	39
WN368	36U	23.50	71.75	31.50	No	2200	Yes	Post-to-post: 17.75″ Hole-to-hole: 18.5″ Max Depth: 26.5″	64.25″	Yes	Key Lock	Yes	39
WN4210	42U	23.50	82.50	39.50	No	2200	Yes	Post-to-post: 17.75″ Hole-to-hole: 18.5″ Max Depth: 34.25″	75″	Yes	Key Lock	Yes	39
WN428	42U	23.50	82.50	31.50	No	2200	Yes	Post-to-post: 17.75″ Hole-to-hole: 18.5″ Max Depth: 26.5″	75″	Yes	Key Lock	Yes	40

727 Phillips Drive, City of Industry, CA 91748 | TEL:1-888-989-1189 | FAX: 1-626-301-0588 | www.istarusa.com

WN1510

15U 1000mm Depth Rack-mount Server Cabinet



Features

- Universal Fit Most of Rackmount Chassis and Equipment
- Double Rear Doors Provide Convenience and Take Less Space to Open
- Front, Rear, and Side Security Lock to Prevent Unauthorized Access to Equipment and Data
- Easy Cabling Management. Cable Entry Provided from Top/ Bottom and Front/ Back
- Fully Adjustable Rails. Mounting Rails are Horizontally Adjustable to Ensure the Best Fit of Rack-mount Chassis
- Vented Doors Provide Maximum Air Flow
- 120mm AC Cooling Fans Provide Excellent Air Circulation
- Custom Front Panel Door with Silk Screen Option Enhance Product Image and Uniformity in Product Line

Introduction

The WN Series Cabinet is built with high-quality aluminum/steel structures. With vented doors and cooling fans, WN series provides excellent air circulation for servers and other devices. Cabinet is completely lockable from the front/ rear doors and side panels to prevent unauthorized access. This stylish and secure 19" rack-mount cabinet protects your investment in computer equipment against environmental elements heat and dust. WN Series offer a superior environment for mission-critical equipment.

Shipping Information

Shipper Design	Standard Carton
Shipper Dimension (inch)	41x25x35
Weight	180 lbs
Pallet Load	2
40-feet HQ Container Loading	82

Specifications

Color	Black (Special Color on Request)
Material	Side Panel: SPCC t:0.8mm Horizontal Rails: SPCC t:2.0mm Vertical Rails: SPCC t:2.0mm Top Panel: SPCC t:1.2mm
Cooling	Up to 3 sets (2 fans per set) of 120 AC Fans. Pre-installed 1 set.
Basic Equipment	Variable 19" Profiles at Front and Backside Vented Lockable Front and Rear Doors Lockable Side Panel
Internal Dimensions	Post-to-post: 17.75" Hole-to-hole: 18.5" Max Depth: 34.25"
Internal Height	27.25"

Accessories

WA-CM1UB	1U Cable Management Rack Kit
WA-CM2UB	2U Cable Management Rack Kit
WA-DT0414	1U Digital Temperature Unit
WA-KBR96B	1U Compact Sliding Keyboard Drawer
WA-LB96B	Cabinet Supporting Bar
WA-P1UB	1U Cabinet Front Cover Plate
WA-P2UB	2U Cabinet Front Cover Plate
WA-P3UB	3U Cabinet Front Cover Plate
WA-PD010	10 Outlet Overload Circuit Breaker Protection Power Distribution Unit
WA-PD014	14 Outlet Lightening Surge Protection Power Distribution Unit
WA-PS010	10 Outlet Power Strip
WA-PS06A	6 Outlet Power Strip
WA-SF120-2FAN	Cabinet 120mm AC Cooling Fans
WA-SF96B	Heavy Duty Rackmount Shelf
WA-SFR80B	Heavy Duty Sliding Tray
WA-SFR96B	Heavy Duty Sliding Tray
WA-SW10-M6	Cabinet/ Rack Screw Kit

WN158

15U 800mm Depth Rack-mount Server Cabinet

Specifications

Color	Black (Special Color on Request)
Material	Side Panel: SPCC t:0.8mm Horizontal Rails: SPCC t:2.0mm Vertical Rails: SPCC t:2.0mm Top Panel: SPCC t:1.2mm
Cooling	Up to 3 sets (2 fans per set) of 120 AC Fans. Pre-installed 1 set.
Basic Equipment	Variable 19" Profiles at Front and Backside Vented Lockable Front and Rear Doors Lockable Side Panel
Internal Dimensions	Post-to-post: 17.75" Hole-to-hole: 18.5" Max Depth: 26.5"
Internal Height	27.25"

WN2210

22U 1000mm Depth Rack-mount Server Cabinet

Specifications

Color	Black (Special Color on Request)
Material	Side Panel: SPCC t:0.8mm Horizontal Rails: SPCC t:2.0mm Vertical Rails: SPCC t:2.0mm Top Panel: SPCC t:1.2mm
Cooling	Up to 3 sets (2 fans per set) of 120 AC Fans. Pre-installed 1 set.
Basic Equipment	Variable 19" Profiles at Front and Backside Vented Lockable Front and Rear Doors Lockable Side Panel
Internal Dimensions	Post-to-post: 17.75" Hole-to-hole: 18.5" Max Depth: 34.25"
Internal Height	39.75"

WN228

22U 800mm Depth Rack-mount Server Cabinet

Specifications

Color	Black (Special Color on Request)
Material	Side Panel: SPCC t:0.8mm Horizontal Rails: SPCC t:2.0mm Vertical Rails: SPCC t:2.0mm Top Panel: SPCC t:1.2mm
Cooling	Up to 3 sets (2 fans per set) of 120 AC Fans. Pre-installed 1 set.
Basic Equipment	Variable 19" Profiles at Front and Backside Vented Lockable Front and Rear Doors Lockable Side Panel
Internal Dimensions	Post-to-post: 17.75" Hole-to-hole: 18.5" Max Depth: 26.5"
Internal Height	39.75"

727 Phillips Drive, City of Industry, CA 91748 | TEL:1-888-989-1189 | FAX: 1-626-301-0588 | www.istarusa.com

WN3610

36U 1000mm Depth Rack-mount Server Cabinet

Specifications

Color	Black (Special Color on Request)
Material	Side Panel: SPCC t:0.8mm Horizontal Rails: SPCC t:2.0mm Vertical Rails: SPCC t:2.0mm Top Panel: SPCC t:1.2mm
Cooling	Up to 3 sets (2 fans per set) of 120 AC Fans. Pre-installed 1 set.
Basic Equipment	Variable 19" Profiles at Front and Backside Vented Lockable Front and Rear Doors Lockable Side Panel
Internal Dimensions	Post-to-post: 17.75" Hole-to-hole: 18.5" Max Depth: 34.25"
Internal Height	64.25"

WN368

36U 800mm Depth Rack-mount Server Cabinet

Specifications

Color	Black (Special Color on Request)
Material	Side Panel: SPCC t:0.8mm Horizontal Rails: SPCC t:2.0mm Vertical Rails: SPCC t:2.0mm Top Panel: SPCC t:1.2mm
Cooling	Up to 3 sets (2 fans per set) of 120 AC Fans. Pre-installed 1 set.
Basic Equipment	Variable 19" Profiles at Front and Backside Vented Lockable Front and Rear Doors Lockable Side Panel
Internal Dimensions	Post-to-post: 17.75" Hole-to-hole: 18.5" Max Depth: 26.5"
Internal Height	64.25"

WN4210

42U 1000mm Depth Rack-mount Server Cabinet

Specifications

Color	Black (Special Color on Request)
Material	Side Panel: SPCC t:0.8mm Horizontal Rails: SPCC t:2.0mm Vertical Rails: SPCC t:2.0mm Top Panel: SPCC t:1.2mm
Cooling	Up to 3 sets (2 fans per set) of 120 AC Fans. Pre-installed 1 set.
Basic Equipment	Variable 19" Profiles at Front and Backside Vented Lockable Front and Rear Doors Lockable Side Panel
Internal Dimensions	Post-to-post: 17.75" Hole-to-hole: 18.5" Max Depth: 34.25"
Internal Height	75"

WN428

42U 800mm Depth Rack-mount Server Cabinet

Specifications

Color	Black (Special Color on Request)
Material	Side Panel: SPCC t:0.8mm Horizontal Rails: SPCC t:2.0mm Vertical Rails: SPCC t:2.0mm Top Panel: SPCC t:1.2mm
Cooling	Up to 3 sets (2 fans per set) of 120 AC Fans. Pre-installed 1 set.
Basic Equipment	Variable 19″ Profiles at Front and Backside Vented Lockable Front and Rear Doors Lockable Side Panel
Internal Dimensions	Post-to-post: 17.75″ Hole-to-hole: 18.5″ Max Depth: 26.5″
Internal Height	75″

Drawing

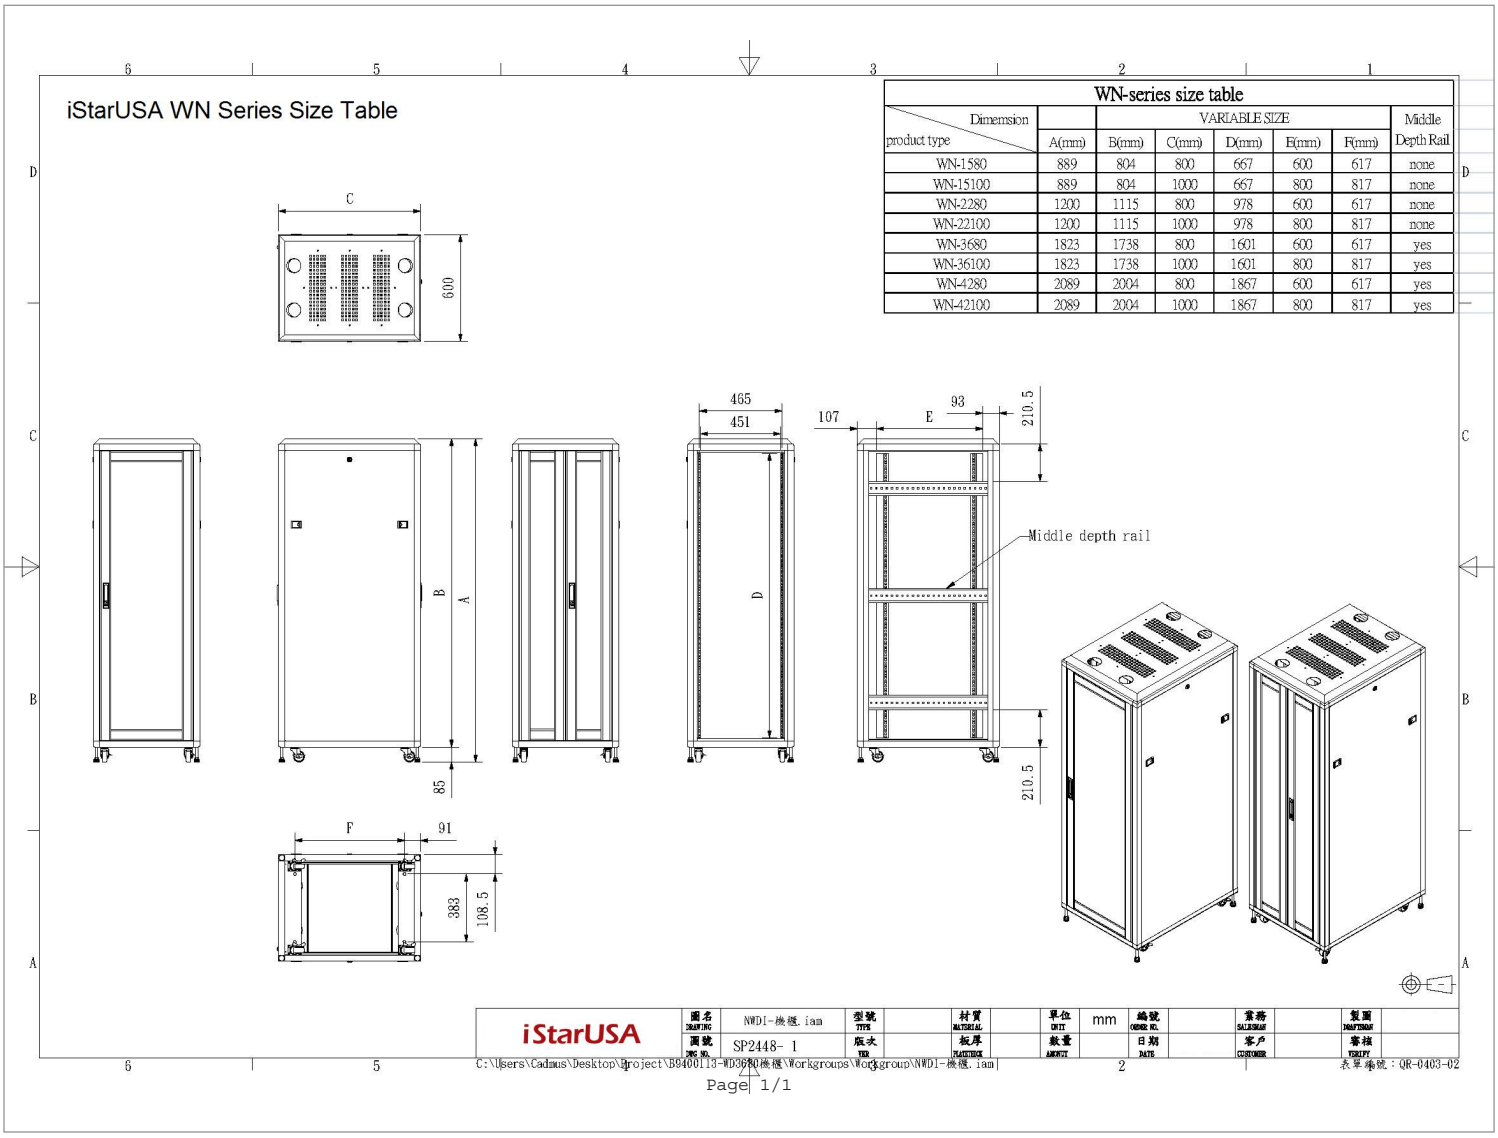

727 Phillips Drive, City of Industry, CA 91748 | TEL:1-888-989-1189 | FAX: 1-626-301-0588 | www.istarusa.com